



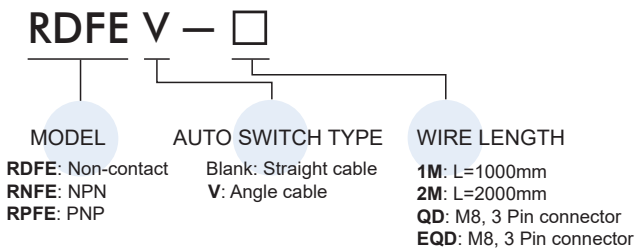

### Order example \* Special order is available.




### Assembling style

Cylinder type	Mounting clamp
MAM*, MCJU, MCFB, MCMJP, MCDJ, MCSF-5, MCRPMS, MSBE, MCRJ-S, MCRQ, MCRQ-S, MCHC-6/32/40, MCHD, MCHH, MCHU, MCHS, MCHX, MCHG2, MCHJ, MCHY, MCRT, MEQI, MESF2, MESBE	

### Dimension


#### Straight cable

#### Angle cable



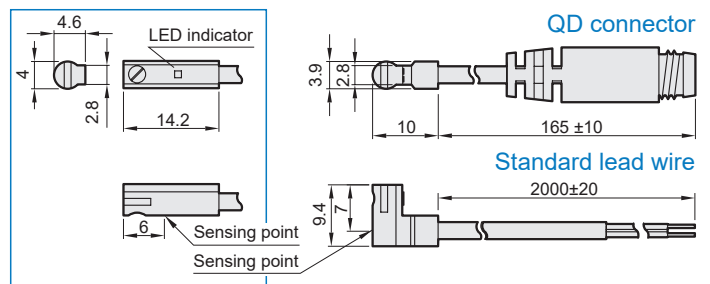


### Wiring of the QD

- 2 wire QD wiring
- 2 wire EQD wiring
- 3 wire QD wiring

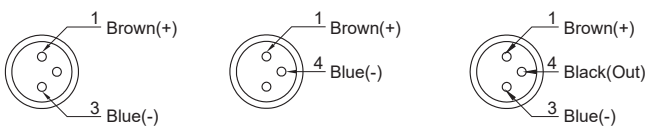

### Specification

Model	RDFE / RDFEV	RNFE	RNFEV	RPFE	RPFEV
Wiring method	2 wire	3 wire			
Switching logic	Solid state output, Normally open				
Switch Type	Non-contact	NPN current sinking		PNP current sourcing	
Operating voltage	5~30V DC	5~30V DC		5~30V DC	
Switching current	50mA max.	50mA max.	80mA max.	50mA max.	80mA max.
Contact rating(*1)	1.5W max.	1.5W max.	2.2W max.	1.5W max.	2.2W max.
Current consumption (*5)	—	10mA @24V DC max.	6mA @24V DC max.	10mA @24V DC max.	6mA @24V DC max.
Voltage drop (*5)	3.5V max.	0.5V @ 50mA max.			
Leakage current (*5)	0.1mA(40uA) max.	0.01mA max.			
Indicator	Red LED				
Cable	ø2.6, 2C, PVC	ø2.6, 3C, PVC			
Operating Frequency	1000 Hz				
Temperature range	-10~+70°C (No freezing)				
Shock (*2)	50G				
Vibration (*3)	9G				
Enclosure classification	IEC 60529 IP67				
Protection circuit (*4)	3, 4				
Weight	12.8 g (1m cable) / 23.8 g (2m cable)				
Connect diagram					

\*1. Warning: Never exceed rating (watt=voltage×amperage). Permanent damage to sensor will occur.

\*6. Caution for safety please refer to page 9-3~4.

\*2. Sin wave / X.Y.Z. 3 directions / 3 times each direction / 11ms each time.

\*3. Double amplitude 1.5mm / 10Hz~55Hz~10Hz(Sweep 1min) / X.Y.Z. 3 directions / 1 hour each time.

\*4. 1=None / 2=Short-circuit / 3=Power source reverse polarity / 4=Surge suppression.

\*5. It bases on conditions of voltage 24V DC, ambient temp. 25°C and cable 2M length. Voltage drop increases in pace with cable length.