
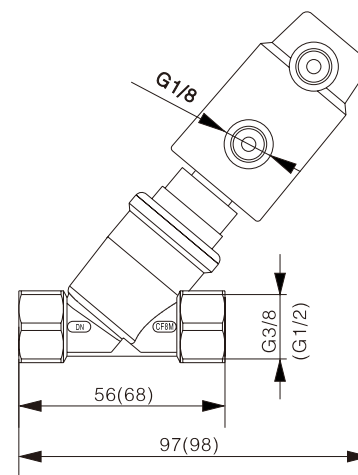


Filling Valve 灌装阀

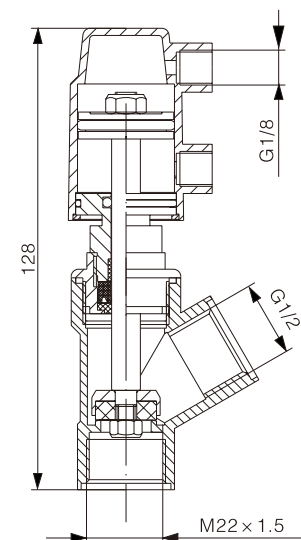


技术参数 Technical Specification

控制方式：双作用自由式
管道压力：0–0.7MPa
控制压力：0.35–0.4MPa
阀体材料：CF8或CF8M
密封材料：PTFE
介质温度：–10—120℃
连接方式：螺纹式


Control method: Double Acting No Spring
Fluid pressure: 0–0.7MPa
Control pressure: 0.35–0.4MPa
Body: CF8/CF8M
Seal: PTFE
Fluid temperature: –10—120℃
Connection: Thread

20 To 13 Filling Valve 20变13灌装阀


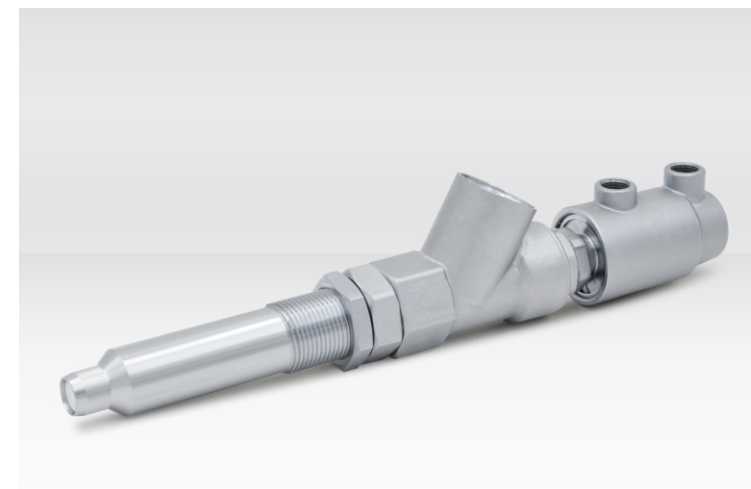


技术参数 Technical Specification

控制方式：双作用自由式
管道压力：0–0.7Mpa
控制压力：0.35–0.4Mpa
阀体材料：CF8或CF8M
密封材料：PTFE
介质温度：–10—120℃
Control mode: double acting freestyle
Fluid Pressure: 0–0.7Mpa
Control Pressure: 0.35–0.4Mpa
Body material: CF8 or CF8M
Seal: PTFE
Fluid temperature: –10—120℃

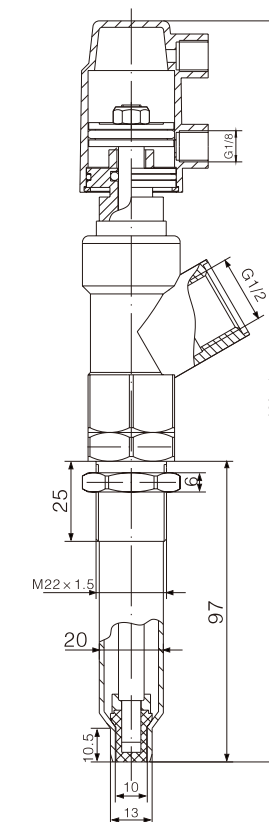

Long length Filling Valve
加长灌装阀

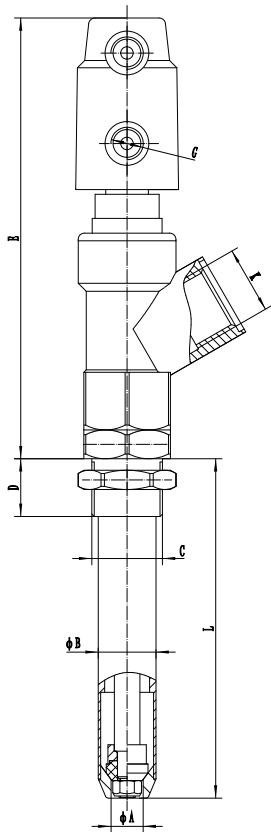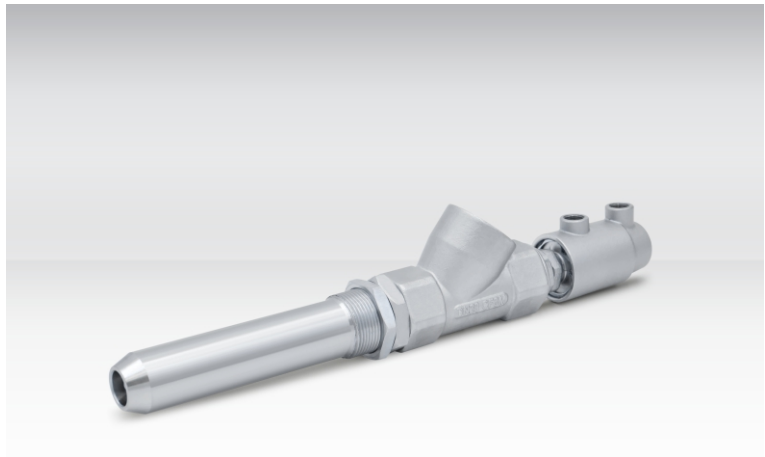

内封灌装阀结构简图





技术参数 Technical Specification

控制方式：双作用自由式 Control mode: double acting freestyle
管道压力：0–0.7Mpa Fluid Pressure: 0–0.7Mpa
控制压力：0.35–0.4Mpa Control Pressure: 0.35–0.4Mpa
阀体材料：CF8或CF8M Body material: CF8 or CF8M
密封材料：PTFE Seal: PTFE
介质温度：–10—120℃ Fluid temperature: –10—120℃


外形尺寸 Dimension

规格 Size	执行器 Actuator	B	C	D	E	出料口直径 Size	G	L
G1/2	27	≤20	M22×1.5	18	138	5~10	G1/8	≤350
G3/4	27	≤25	M22×1.5	18	150	5~10	G1/8	≤350
G1/2	32	≤20	N22×1.5	18	140	5~10	G1/8	≤400
G3/4	32	≤25	M28×1.5	18	156	5~14	G1/8	≤400
G1/2	40	≤25	M28×1.5	18	180	5~14	G1/8	≤1500
G3/4	40	≤25	M28×1.5	18	194	5~14	G1/8	≤1500
G1	50	≤35	M28×1.5	18	228	14~21	G1/8	≤1500
G11/4	50	≤42	M45×1.5	20	267	22~27	G1/8	≤1500
G11/4	63	≤42	M45×1.5	20	283	22~27	G1/8	≤1500
G11/2	50	≤50	M53×1.5	20	268	28~33	G1/8	≤1500
G11/2	63	≤50	M53×1.5	20	284	28~33	G1/8	≤1500
G2	63	≤70	M74×1.5	20	312	34~47	G1/8	≤1500
G21/2	90	≤89	M92×1.5	20	284	48~60	G1/4	≤1500

Long length Filling Valve
加长灌装阀

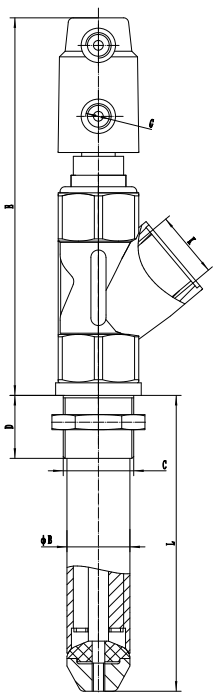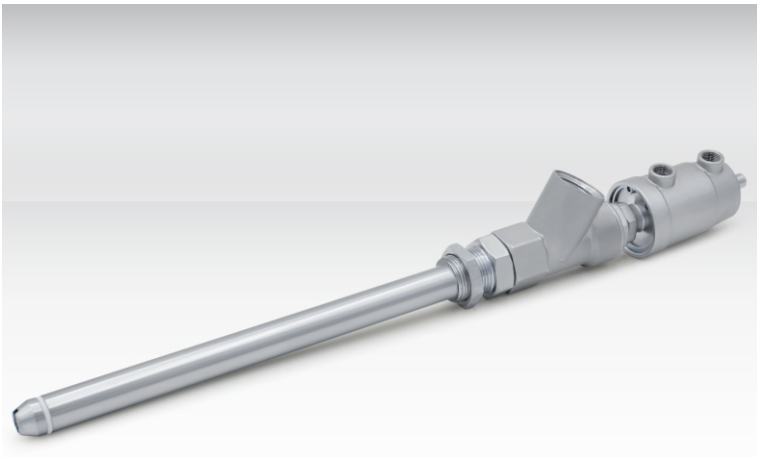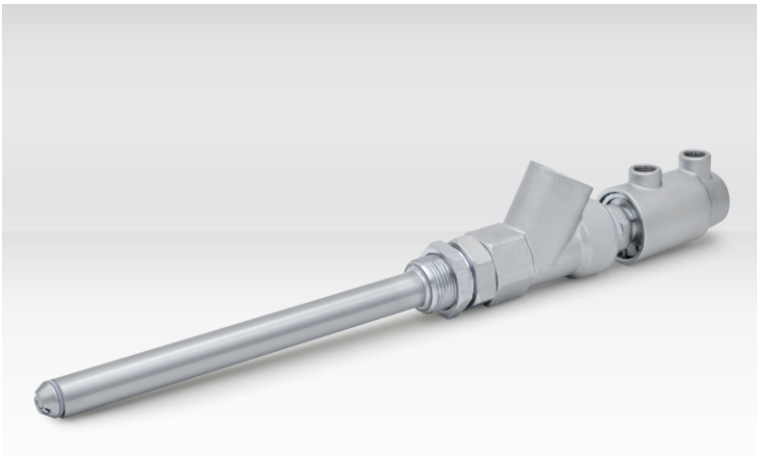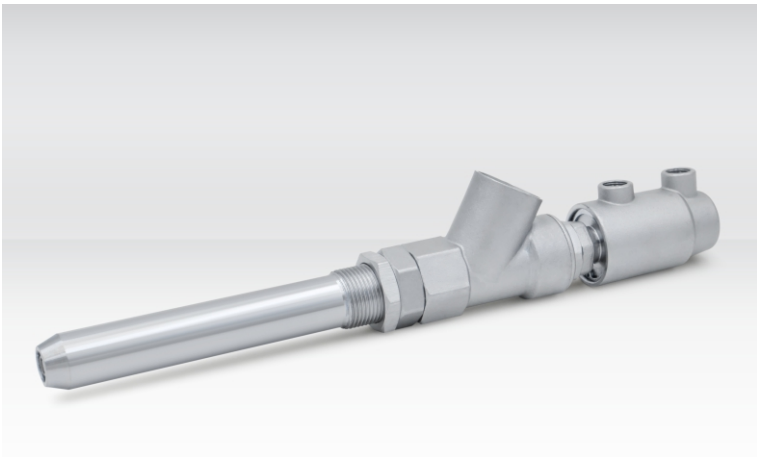

外封灌装阀结构简图

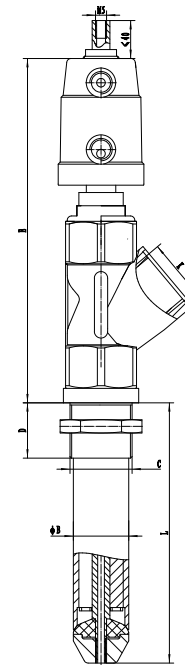

回吸灌装阀结构简图